



PATENT
0941-0308P

IN THE U.S. PATENT AND TRADEMARK OFFICE

Applicant: TAN, Chih-Ping Conf.: 9228
Appl. No.: 09/930,204 Group: 2826
Filed: August 16, 2001 Examiner: A.O. WILLIAMS
For: PROTECTION CIRCUIT FOR MOS COMPONENTS
(As Amended)

LETTER

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

February 24, 2004

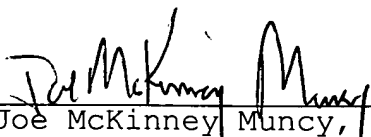
Sir:

Enclosed please find an English translation of Taiwanese priority document No. 090105923, filed on March 14, 2001, which shows the differences between the present application and the priority application.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 02-2448 for any additional fee required under 37 C.F.R. §§ 1.16 or 1.17; particularly, extension of time fees.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By 
Joe McKinney Muncy, #32,334

KM/asc
0941-0308P

P.O. Box 747
Falls Church, VA 22040-0747
(703) 205-8000

Attachment



TITLE

Method for protecting MOS components from antenna effect and the apparatus thereof

5

ABSTRACT OF THE DISCLOSURE

A method for protecting MOS components from antenna effect and the apparatus thereof. Via the bypass PMOS and NMOS transistors, charges with either polarity accumulated by antenna effect are conveyed and neutralized. The present invention thus protects the gate oxide layer of the MOS component in the IC circuit from damage or degradation.

10

ILLUSTRATION OF THE INVENTION

The present invention relates in general to a method to protect MOS components and the apparatus thereof, and more particular, to a method to protect MOS components from antenna effect and the apparatus thereof.

15

During plasma etching, damaging induced by plasma to the MOS component is referred to as plasma charging damaging, or antenna effect. Due to the uneven distribution characteristics of charges in plasma, charges are accumulated on the conductors (such as: polysilicon or aluminum alloys) with large surface areas or long sides. The charges generate an electric field on the gate oxide layer of the MOS component. When enough charges are collected, the electric field across the gate oxide layer changes the properties of the MOS component. More severe damage may occur if the current is high enough to pass through the gate oxide layer.

20

25

Fig.1 shows a conventional circuit design using a diode to reduce the antenna affect. In Fig.1, T1 is a MOS component in an integrated circuit (IC), the substrate (or bulk) B of the MOS is coupled to its own source, or to a positive power rail VDD (a negative power rail VSS). The diode D1 has its anode coupled to the substrate of the IC. It is assumed that the conductive line L1 connected with the gate of the MOS component T1 has a very large surface area or periphery length. Due to the plasma characteristics, a large amount of charges is accumulated on the conductive line L1, causing the antenna affect (as the antenna shown in Fig.1).

If the accumulated charges are negative charges, the diode D1 provides a discharge path to release the negative charges to the substrate of the IC, preventing damaging made to the gate oxide layer of the MOS component T1. However, when the accumulated charges are positive charges, no discharge path exists. The electric field across the gate oxide layer thus degrades the layer. Moreover, the large stray capacitance of the diode D1 compromises the operating rate of the IC circuit, resulting in slower operating speeds.

Fig.2 shows a conventional circuit design using a transmission gate to reduce the antenna effect. In Fig.2, the conductive line L2 connected to the gate of the MOS component T2 has very a large area or is very long. Due to the plasma distribution characteristics, large amounts of charges are accumulated on the conductive line L2, causing the antenna effect (as the antenna shown in Fig.2). Herein, T2 is the MOS component of a IC circuit with its substrate B connected to the source or a positive power rail VDD (a negative power rail VSS).

删除: fixed

删除: (

删除: or

删除: fixed

删除: (

删除: or

To reduce the antenna effect, a transmission gate is placed in the IC circuit in Fig.2 and coupled with the gate of the MOS component T2. In the NMOS transistor NT of the transmission gate, the gate and the substrate are respectively coupled to the nodes VDD and VSS. In the PMOS transistor PT of the transmission gate, the gate and the substrate are respectively coupled to the nodes VSS and VDD. Irrespective of whether the accumulated charges in the antenna effect are of either of the bias polarities, they are discharged through the parasitic diodes between the source/drain and the substrate of the NMOS transistor NT (or PMOS transistor PT) to prevent the MOS component T2 from degradation.

Because the transmission gate is located on the path for controlling the gate of the MOS component T2, and the transmission gate has parasitic capacitor C and resistance R, the RC constant will lead to the delay of the control signal sent to the gate of T2 and compromise the operating rate of the MOS component T2. To enhance the operating rate of the MOS component T2, resistance R is expected to be reduced. The easiest way to reduce the resistance R is to cut the channel length or increase the channel width of the transmission gate. However, by doing so, the capacitance C is simultaneously increased. Therefore, it is awkward to reduce the antenna effect by adjusting the R and C values according to the configuration in Fig.2.

An object of the present invention is to provide a method for protecting an MOS component from the antenna effect and the apparatus thereof. In the present invention, via the bypass PMOS and NMOS transistors, charges with either polarity accumulated by antenna effect are conveyed and neutralized, thereby

删除: n

删除: apparatus

protecting the gate oxide layer of the MOS component in the IC circuit from damage or degradation

According to the above object, the present invention provides a method for protecting an MOS component from antenna
5 effect. The method comprises disposal, between a first voltage node and the MOS component, of a bypass PMOS transistor, the gate, source and substrate of which are coupled to the first voltage node and the drain of which is coupled to the gate of the MOS component; and disposal, between a second voltage node
10 and the MOS component, of a second bypass NMOS transistor, the gate, source and substrate of which are coupled to the second voltage node and the drain of which is coupled to the gate of the MOS component.

When positive charges accumulate on the gate of the MOS
15 component due to the antenna effect, the bypass PMOS transistor conveys the positive charges to the first voltage node to prevent them from entering and damaging the MOS component. When the negative charges accumulate on the gate of the MOS component due to the antenna effect, the bypass NMOS transistor conveys the
20 negative charges to the second voltage node to prevent them from entering and damaging the MOS component.

According to the above object, the present invention provides an apparatus for protecting an MOS component from antenna effect. The apparatus includes a bypass PMOS transistor
25 whose gate, source and substrate are coupled to a first voltage node, wherein the bypass PMOS transistor conveys the positive charges to the first voltage node to prevent them from entering and damaging the MOS component when positive charges are
30 accumulated on the gate of the MOS component due to antenna effect; and a bypass NMOS transistor, whose gate, source and

删除: The apparatus comprises a bypass PMOS transistor whose gate, source and substrate are coupled to a first voltage node, and that, when positive charges are accumulated on the gate of the MOS component due to antenna effect, conveys the positive charges to the first voltage node to prevent them from entering and damaging the MOS component; and a bypass NMOS transistor, whose gate, source and substrate are coupled to a second voltage node, and that, when negative charges are accumulated on the gate of the MOS component due to the antenna effect, conveys the negative charges to the second voltage node to prevent them from entering and damaging the MOS component. . .
Another

删除: of

删除: is to

substrate are coupled to a second voltage node, wherein the
bypass NMOS transistor conveys the negative charges to the
second voltage node to prevent them from entering and damaging
the MOS component when negative charges are accumulated on the
gate of the MOS component due to the antenna effect.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention can be more fully understood by
reading the subsequent detailed description in conjunction with
the examples and references made to the accompanying drawings,
wherein:

Fig. 1 is a perspective diagram of a conventional circuit
using a diode to reduce the antenna effect;

Fig. 2 is a perspective diagram of a conventional circuit
using a transmission gate to reduce the antenna effect; and

Fig. 3 shows the embodiment of the present invention for
reducing the antenna effect.

DESCRIPTION OF SYMBOL

D1~diode;

T1-T3~NMOS transistor;

Antenna~antenna effect;

T~NMOS transistor;

PT~PMOS transistor;

L1-L3~conductive line;

BN~bypass NMOS transistor;

BP~bypass NMOS transistor;

格式化: 字型: 粗體

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Fig.3 shows a circuit of the embodiment of the present
invention to reduce the antenna effect.

Referring to Fig.3, the present invention provides a method for protecting a MOS component from antenna effect. The method comprises:

(1) The disposal, between a first voltage node VDD and the MOS component T3, of a bypass PMOS transistor BP, the gate, source and substrate of which are coupled to the first voltage node VDD and the drain of which is coupled to the gate of the MOS component T3 through conductive line L3; and

(2) Disposal, between a second voltage node VSS and the MOS component T3, of a bypass NMOS transistor BN, the gate, source and substrate of which are coupled to the second voltage node VSS, and the drain of which is coupled to the gate of the MOS component T3 through conductive line L3.

In this embodiment, the MOS transistor T3 is a NMOS transistor, but it also can be a PMOS transistor.

格式化: 縮排: 左: 1.27 cm

Referring to Fig.3, according to the method described, the following apparatus is proposed for protecting an MOS component from the antenna effect, the apparatus comprising:

(1) a bypass PMOS transistor BP, the gate, source and the substrate of which are coupled to a first voltage node VDD, and the stray diode of which, when positive charges are accumulated on the gate of the MOS component through the conductive line L3 due to the antenna effect, conveys the positive charges to the first voltage node VDD to prevent the positive charges from entering and damaging the gate oxide layer of the MOS component T3; and

(2) a bypass NMOS transistor BN, the gate, source and substrate of which are coupled to a second voltage node VSS, and the stray diode of which, when the negative charges are

accumulated on the gate of the MOS component T3 through the
conductive line L3 due to the antenna effect, conveys the
negative charges to the second voltage node VSS to prevent
them from entering and damaging the gate oxide layer of the
MOS component T3.

Therefore, the present invention has the following
advantages:

- (1) Conveyance of the positive charges accumulated through
the antenna effect to the voltage node VDD via the
bypass PMOS transistor BP; and of the negative charges
accumulated through the antenna effect to the voltage
node VSS via the bypass NMOS transistor NP. Thus, the
present invention neutralizes the accumulated charges
of either polarity.
- (2) The present invention uses bypass NMOS and PMOS
transistors, wherein the stray capacitances are
between the drains and substrates of the bypass
transistors only. Compared to the transmission gate
in Fig.2, the design of the present invention reduces
the parasitic capacitance substantially, and the
resistance referred in Fig.2 is omitted. Thus the
operating rate of the protected component is enhanced.
- (3) The bypass NMOS and PMOS transistors in the present
invention enhance the compatibility of IC circuit with
MOS process with other MOS component.

Finally, while the invention has been described by way of
example and in terms of the preferred embodiment, it is to be
understood that the invention is not limited to the disclosed
embodiments. On the contrary, it is intended to cover various

modifications and similar arrangements as would be apparent to those skilled in the art. Therefore, the scope of the appended claims should be accorded the broadest interpretation so as to encompass all such modifications and similar arrangements.

5

What Is Claimed Is:

1. An apparatus for protecting a MOS component from antenna effect, the apparatus comprising:

10 a bypass PMOS transistor, having a gate, a source and a substrate, all coupled to a first voltage node; wherein when positive charges are accumulated on the gate of the MOS component due to antenna effect, the bypass PMOS transistor conveys the positive charges to the first voltage node to prevent the positive charges from entering and damaging the MOS component;

15 and

a bypass NMOS transistor, having a gate, a source and a substrate, all coupled to a second voltage node; when negative charges are accumulated on the gate of the MOS component due to antenna effect, the bypass NMOS transistor conveys the negative charges to the second voltage node to prevent the negative charges from entering and damaging the MOS component.

20

2. A method for protecting a MOS component from antenna effect, comprising:

25

Disposal, between a first voltage node and the MOS component, of a bypass PMOS transistor the gate, the source and substrate of which are coupled to the first

voltage node and the drain of which is coupled to the gate of the MOS component; and

Disposal, between a second voltage node and the MOS component, of a bypass NMOS transistor the gate, source and substrate of which are coupled to the second voltage node and the drain of which is coupled to the gate of the MOS component;

wherein when positive charges are accumulated on the gate of the MOS component due to antenna effect, the bypass PMOS transistor conveys the positive charges to the first voltage node to prevent the positive charges from entering and damaging the MOS component; when negative charges are accumulated on the gate of the MOS component due to antenna effect, the bypass NMOS transistor conveys the negative charges to the second voltage node to prevent the negative charges from entering and damaging the MOS component.